


Series APT4000 Transmitter Model Selection Guide (pH, Toridal and Contacting Conductivity)

Instructions

APT4000 Transmitter Offers:

- Power Requirements - Universal, 20 to 253V AC/DC 45 to 65 Hz
- Standard - NEMA 4X, IP65
- Standard Approvals:
 - General Purpose; also FM Class I, Div 2, Groups A-D
- Standard - All models CE Compliant
- High/Low Alarm Relays
- Three mounting types: (must be ordered separately)
 - Panel Mount Kit
 - Pipe/Wall Mount Kit
 - Protective Hood (requires Pipe/Wall Mount Kit)

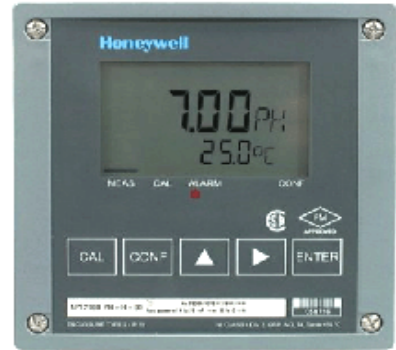

Instructions

- Select the desired key number. The arrow to the right marks the selection available.
- Make one selection from Tables using the column below the proper arrow.
A dot (•) denotes unrestricted availability.

Key Number

-

KEY NUMBER	Selection	Availability		
Description of Measurement Type				
pH/ORP Glass Electrodes: Internal pre-amp used Durafet II Electrodes: Cap adapter is required	APT 4000 PH	↓		
Toroidal (Electrodeless) Conductivity	APT 4000 TC		↓	
Contacting Conductivity	APT 4000 CC			↓

TABLE I - Optional Equipment

User's Manual	English	E__	•	•	•
Future		_0_	•	•	•
Future		__0	•	•	•

APT4000 Transmitter

Accessories

Accessory Parts	Part Number
Mounting Kits (ordered separately from Transmitter)	
Panel Mounting Kit	51205990-001
Pipe/Wall Mounting Kit	51205988-001
Protective Hood (requires pipe/wall kit)	51205989-001
Instruction Manual - pH	70-82-25-103
Instruction Manual - Toroidal (Electrodeless) Conductivity	70-82-25-105
Instruction Manual - Contacting Conductivity	70-82-25-104